G. R. S. 59]

GENERAL AND REVENUE SECRETARIAT.

1900
~~1901~~
(L B

File No. 92 of 1900

Serial Nos. 1–2

B
~~Papers~~ Filed.

Month September 1900

SUBJECT.

Construction of a well at Kindlur in Thoi
Jarikoro Dalukh.

Indexed - L.S. Subba Rao

PREVIOUS REFERENCES.	LATER REFERENCES.
L B-78 of 1899	Commencement Ltr

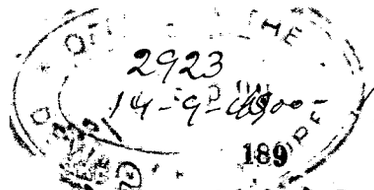

L441
83

189

FROM The President of the Local Fund Board Kadur Circle

To The Secretary to the Govt. of Mysore General & Rev. departments.

Dated 11th September 1900.

Despatched 12th

Received

General No. 177

No.

SECTION L.B
19.9.1900

Enclosure No. 2

Submitting an estimate for Rs 682/- for sanction, for constructing a drawing well at Kudlur in the Sankeri Taluk

1900 - 1901

Office of the President of the Local
Fund Board, Kadur Circle,
Dated Tarikere 11th September 1900.

From,

The President of the Local Fund Board,
Kadur Circle.

To,

The Secretary to the Government
of Mysore, General & Revenue Depts.

Sir,

With reference to Government order
No: 1,757-8 / L.F. 15-99 dated the 2nd August 1900, Sanc-
-tioning Rupees 5,000/- for well works &c
with the remark that only very urgent ones
should be proceeded with; I have the honor
to submit herewith for sanction, an Estimate
out of the above Grant

1. Total amount of the Estimate =	Rs 1,232	for Rupees 882/-
2. Deduct ryots Contribution =	350	for constructing
3. Balance to be sanctioned from Govt: —	882.	a drawing well

at Kudlur in the Tarikere taluk. The President
Mr. B. R. Venkatararadiengar, considering
the necessity urged by the Villagers for a
well, asked the amildar to start with
the work immediately, pending the Sub-
-mission

of an estimate for approval. I inspected the village on the 2nd September 1900 and found that it is a pretty large one consisting of about 200 houses with no water supply at present and a well is therefore very necessary The work is approaching completion

2 A duplicate Copy of the abstract of the Estimate is enclosed.

I have the honor to be
Sir,
Your most obedient Servant

Hill Park
President of the
Local Board
Kadur Circle

Items	Per	Rate	Quantity	Amount
Cutting soft rock	cyd	2 -	50	100
Blasting hard rock	cyd	4 -	198	792
Rough stone lining	cyds	1 4 -	80	100
Burnt stone slabs dressed	Sqft	- 5 -	300	94
Jungle wood work	cft	1 12 -	18	31
Do — Pulleys —	Each	- -	6	18
Burnt stone in Chunam	cft	4 -	250	62
Bailing Water		L. S.		20
Backing earth behind the Stone lining		L S		15
		Total		1232
Deduct Ryots Contribution				350
Balance amount to be Sanctioned				882

85

Read

Letter No. 1779 of 11th Sept. 1900
from the Pres.t of the D.F. Board
Kadur circle submitting for
sanction an estimate for Rs 1232
including the 1/10th Contribution
of Rs 350 for constructing a
draw-~~ing~~ well at Kadlur in the
Tarikere Taluk.

L B
9 20 of 1900

No. 2

Order thereon No. 4634-35
2.7.15-99
dt 27 Sept. 1900

The estimate received with the
above is sanctioned. The net
cost of Rs 882 excluding the
1/10th Contribution will be met
from the sum of Rs 5000 sanc-
-tioned from L.F. Genl. ~~in~~
Govt. Pro: No. ~~1754-7-58~~ 175-7-58 dt 3rd Aug.
2.7.15-99
~~as proposed by the Pres.t~~

Rq 1564

Intimated to Pres.t
vide C. letter

Vide L B. 1899 98 16

A 22/9/00
Secretary
Dng 20-9-00

20/9/1900
Des

Do The Pres.t of the D.F. Board
Kadur circle
with sanctd estimate
Comptroller Notte
Copy of abstract
estimate

Trans